


Layered MDF Construction


Patented *Fiberfuse* Process Bonds
Components under Extreme Pressure

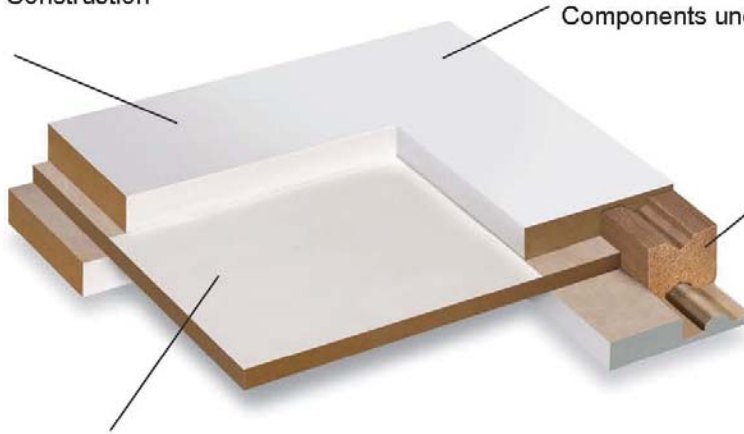

Patented *Integra-Lok* Wood Stile
Double Primed Standard

Ultra Refined MDF Solid Raised or Flat Panels
With Optional Sticking Profiles

- STANDARD THICKNESS 1-3/4" & 1-3/8"
- STANDARD DOOR WIDTHS:
2/0, 2/4, 2/6, 2/8, 3/0, 3/6, 4/0
- STANDARD DOOR HEIGHTS:
6/8, 7/0, 8/0
- 20 MIN. FIRE RATING AVAILABLE ON
1-3/4", 11/16" FP & 1-1/4" RP
- WARRANTY:
SEE LIMITED LIFETIME WARRANTY
- HARDWARE MACHINING:
TO SPECIFICATION
- 45-90 MIN FIRE RATED PROFILES
AVAILABLE

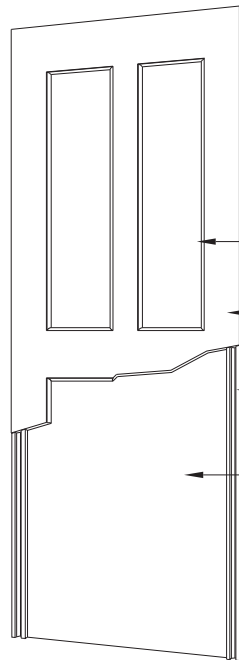

CHOICE OF STICKING AND PANELS

PREMIUM PRIMED MDF

INTEGRA-LOK® STILES STANDARD

LAYERED MDF CONSTRUCTION